



RSI UPSTAND ACCESS COVERS

RSI Overview



Surespan RSI aluminium single or double leaf upstand floor access covers are rated at 2.5 or 5kN/m² loading. The patent frame incorporates a single or double unbroken seal, to help prevent the ingress of dirt and moisture offering near water and airtight seal.

The access covers come complete with high grade stainless steel gas spring assisted lids, which are locked in the open position with safety hold open stays against accidental closure. A stainless steel slam action Cablock is fitted as standard to lock the lids

STANDARD FEATURES

- Custom made to any size
- Rated up to FACTA Class A loading
- Tread Plate Lid
- Maximum opening 85°
- Gas spring assisted operation
- Standard Tee Key Lock
- Hold open stay - against accidental closure
- Near water and airtight seal

Material:	Cover and frame aluminium.		
Cover:	Single or double leaf. Designed to prevent the ingress of rainwater, animals and insects. Rated at 2.5 or 5kN/m ² loading.		
Frame:	Patent frame incorporates a double unbroken seal, offering near water and airtight seal.		
Hinges:	Unique hinges to help prevent the ingress of dirt and moisture.		
Locking:	A stainless steel slam action Cablock is fitted as standard to lock the lids. The locks are easily opened from the inside and Tee Key operated from the outside. Other locking options available.		
Operation:	The unit comes complete with gas spring assisted lift. The lid locks in the open position with a safety hold open stay to prevent against accidental closure.		
Finish:	The covers are self colour as standard with polyester powder coating to any standard RAL colour as an additional item.		
Options:	Electric/Hydraulic Retractable safety grid SureGrip Non-slip	FACTA A-E loading 45dB acoustic rated	Insulated Lid

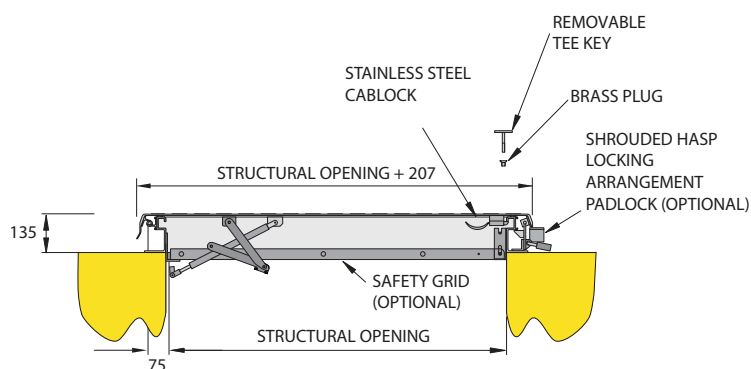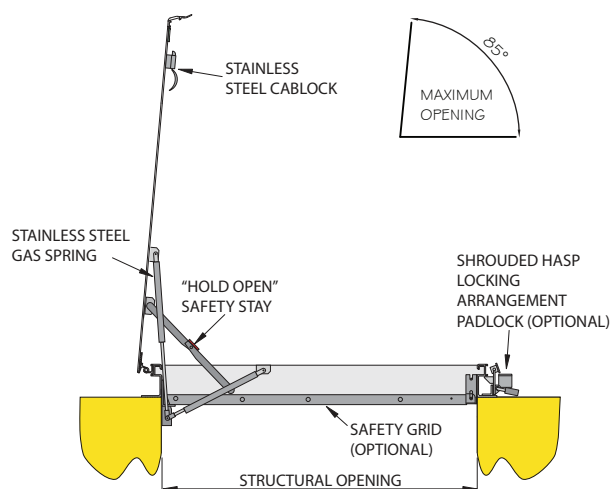



RSI UPSTAND ACCESS COVERS

